


[February 2018 Lead2pass 400-351 New Questions For Passing The 400-351 Certification Exam 305q

Lead2pass Cisco New Exam 400-351 VCE Files Free Instant Download: <https://www.lead2pass.com/400-351.html> QUESTION 11

While troubleshooting a failed central web authentication configuration on cisco WLC, you discover that the Cisco WLC policy manager state is showing RUN For new client and not CENTRAL_WEB_AUTH, what is most likely the issue.? A. The WLAN Layer 2 security should be sent to WPA+WPA2B. The WLAN NAC state should be set to RADIUS NACC. The web login page under the cisco WLC security should be set to external (redirect to external server)D. The WLAN layer 3 security should be set to web page policy with condition web redirect.


Answer: B QUESTION 12Two autonomous Aps are connected to a switch on the same VLAN both APS are configured with the same SSID and WPA2-PSK. After making configuration changes to one of the APs .spanning tree disabled one of the switch ports into which AP was plugged? Which two options describe possible reasons that spanning tree disabled a port? (choose Two) A. One of the Aps was configured as a universal workgroup bridge.B. It is not possible for spanning tree to disable a port. The bridging loop must have been coincidentalC. Spanning tree was disabled on both ApsD. PortFast was enabled on all portsE. One of the APs was configured as a standard workgroup bridge. Answer: AE

QUESTION 13During the Cisco 5760 WLC high availability active and standby process (elected or re-elected), which factor can determine which Cisco 5760 WLC become active? A. The cisco 5760 WLC the highest stack member priority valueB. the cisco 5760 WLC the highest IP addressC. the cisco 5760 WLC the lowest stack member priority value.D. the cisco 5760 WLC the highest Mac address Answer: A QUESTION 14Refer to the exhibit your colleague a junior network engineer is struggling to enable DHCP option 82 in the layer 3 switch which is in the DMZ for a mobile client under a guest anchor Cisco wireless LAN controller deployment . What is your answer?

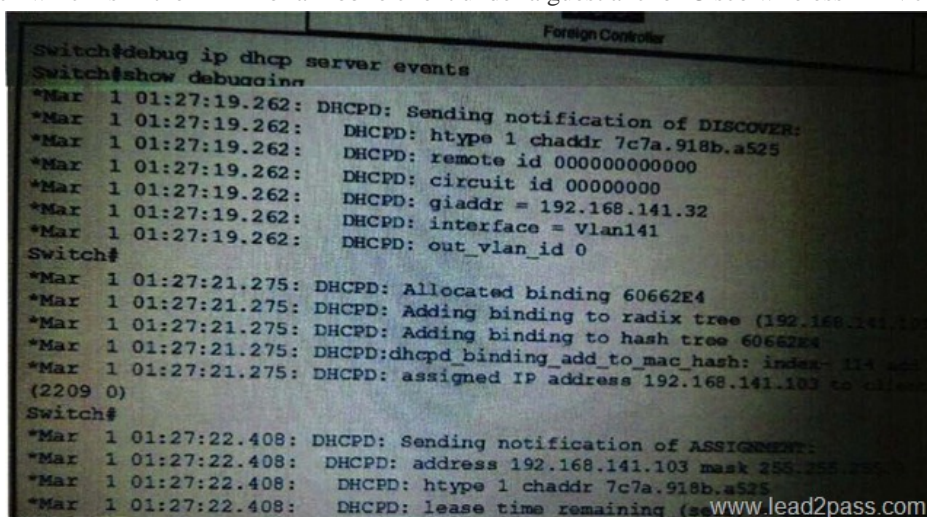

```
Switch#debug ip dhcp server events
Switch#show debugging
*Mar 1 01:27:19.262: DHCPD: Sending notification of DISCOVER:
*Mar 1 01:27:19.262: DHCPD: htype 1 chaddr 7c7a.918b.a525
*Mar 1 01:27:19.262: DHCPD: remote id 000000000000
*Mar 1 01:27:19.262: DHCPD: circuit id 00000000
*Mar 1 01:27:19.262: DHCPD: giaddr = 192.168.141.32
*Mar 1 01:27:19.262: DHCPD: interface = Vlan141
*Mar 1 01:27:19.262: DHCPD: out_vlan_id 0
Switch#
*Mar 1 01:27:21.275: DHCPD: Allocated binding 60662E4
*Mar 1 01:27:21.275: DHCPD: Adding binding to radix tree (192.168.141.103)
*Mar 1 01:27:21.275: DHCPD: Adding binding to hash tree 60662E4
*Mar 1 01:27:21.275: DHCPD:dhcpd_binding_add_to_mac_hash: index= 114 add
*Mar 1 01:27:21.275: DHCPD: assigned IP address 192.168.141.103 to client
(2209 0)
Switch#
*Mar 1 01:27:22.408: DHCPD: Sending notification of ASSIGNMENT:
*Mar 1 01:27:22.408: DHCPD: address 192.168.141.103 mask 255.255.255.0
*Mar 1 01:27:22.408: DHCPD: htype 1 chaddr 7c7a.918b.a525
*Mar 1 01:27:22.408: DHCPD: lease time remaining (see www.lead2pass.com
```

A. DHCP proxy must be enabled for DHCP option 82 to operate correctly. All Cisco WLCsthat will be in the setup must have the same DHCP proxy setting.B. DHCP option 82 must be enabled on the dynamic interface with which theWLANis associatedC. DHCP option 82 is not supported when it is used with auto-anchor mobilityD. The mobility tunnel datapath control path or both between the anchor cisco WLC and foreign WLC are down. Answer: C QUESTION 15RX-SOP is configured for SGHz radio with value set as "High Threshold". Which two clients will associate to the AP? (Choose Two) A. client with RSSI-75 dBmB. client with RSSI-79dBmC. client with RSSI-77dBmD. client with RSSI-73dBm Answer: AD QUESTION 16Which MSS value is appropriate on a Cisco 5508 WLC in an IPV6-only environment? A. 1236B. 2131C. 1285D. 1331 Answer: D QUESTION 17Refer to the exhibit .according to the debugs and loin the Cisco WLC and Cisco LAP which WLC discovery Algorithm is used by the LAP to join the Cisco WLC?

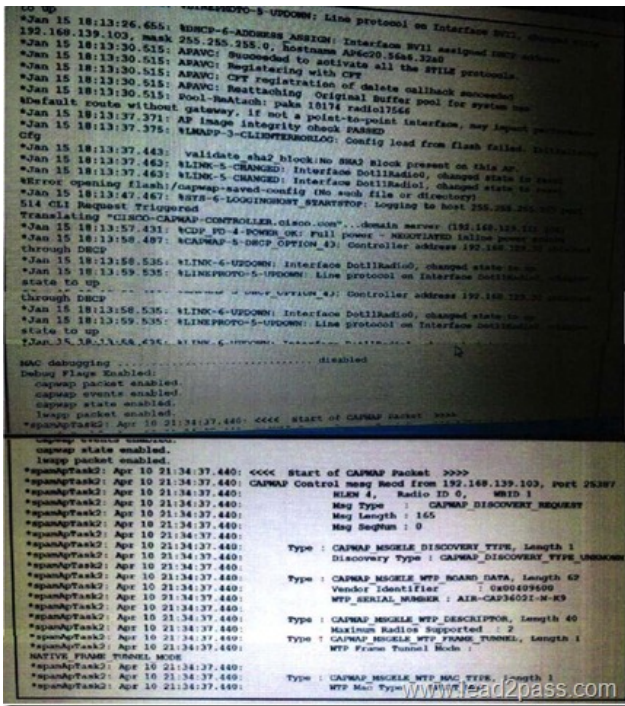

A. DHCP server LAP sends a layer 3 CAPWAP discover request to the Cisco WLC that is listed in the DHCP option 43. B. configured LAP sends a unicast layer 3 CAPWAP discover request to the Cisco WLC IP address that the LAP has in its NVRAM. Broadcast lap broadcasts a layer 3 CAPWAP discover message on the local ip subnet. DNS lap resolve the DNS Name CISCO-CAPWAP-CONTROLLER cisco to the Cisco WLC ip address then it sends a unicast layer 3 CAPWAP discovery request to the Cisco WLC Answer: A QUESTION 18 Which port does cisco JSE use by default to send RADIUS CoA messages to the Cisco WLC? A. UDP 3799 B. UDP 1813 C. UDP 1700 D. TCP 1812 Answer: C **400-351 dumps full version (PDF&VCE):**
<https://www.lead2pass.com/400-351.html> Large amount of free **400-351** exam questions on Google Drive:
<https://drive.google.com/open?id=0B3Syig5i8gpDY0FaMFVrWHdXWEk>